



NKLT - NKLP Rocker Arm Spot Welder

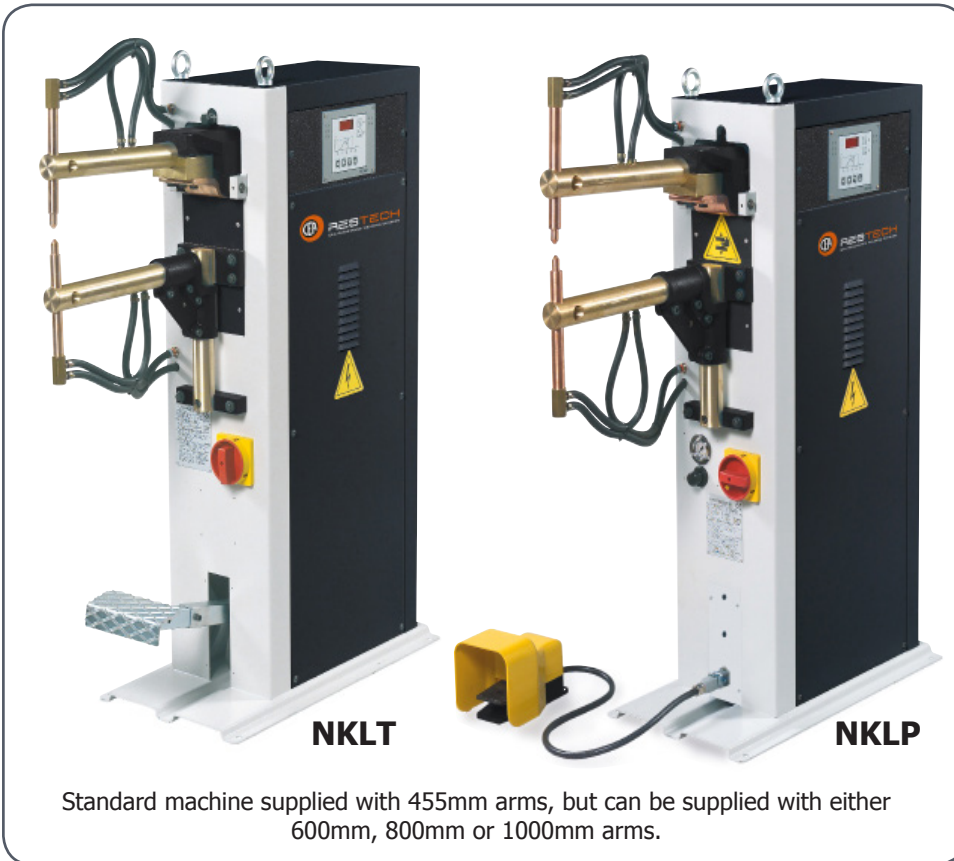

NKLT

NKLP

Standard machine supplied with 455mm arms, but can be supplied with either 600mm, 800mm or 1000mm arms.

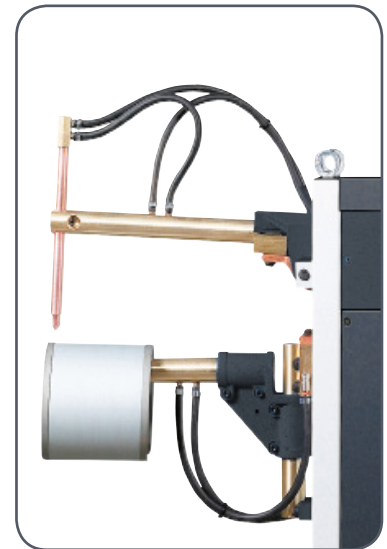


Machines are available with lower arm configurations suitable for jobs with restricted access. Available from 455mm - 1000mm



Lower arm with adjustable height

Technical Specifications		NKLT 28 NKLP 28	NKLT 48 NKLP 48
Single Phase Input	V 50/60 Hz	400	400
Rated Power @ 50%	kVA	25	45
Max. Welding Power	kVA	54.7	75
Installed Power	kVA	14	24
Fuse (Delayed Action)	A	36	63
Open Circuit Voltage	V	4.2	5.2
Secondary Short Circuit Current	kA	14	17.8
Max. Welding Current	kA	11.2	14.2
Electrode Force Max (6 Bar)	daN	220	260
Water Consumption	l/min	3.8	3.8
Dimensions	Depth mm	980	1020
	Width mm	390	390
	Height mm	1250	1250
Weight	kg	167	194

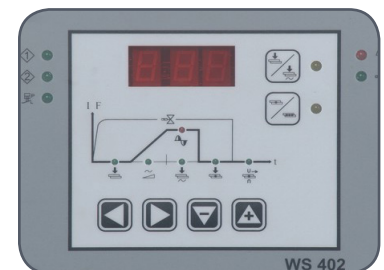

Control WS 402



Prospot Limited – Unit C Riverside Industrial Estate
Atherstone Street – Fazeley – Tamworth – Staffordshire – B78 3RW
Telephone – 01827 254 829 Fax – 01827 254 832
Email – sales@prospot.co.uk Web – www.prospot.co.uk